


Telescopic pillars


For ophthalmic equipment CPMA

Offset load diagram CPMA1-1

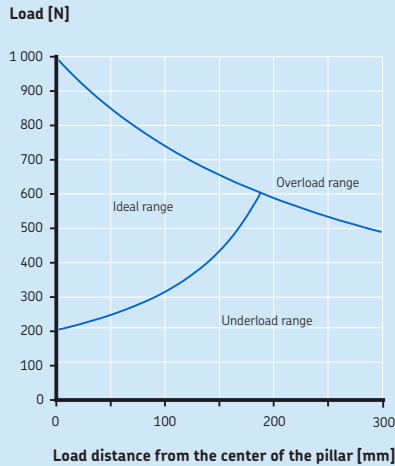


Offset load at full extension in the best axis

Offset load diagram CPMA1-2 and CPMA2-2

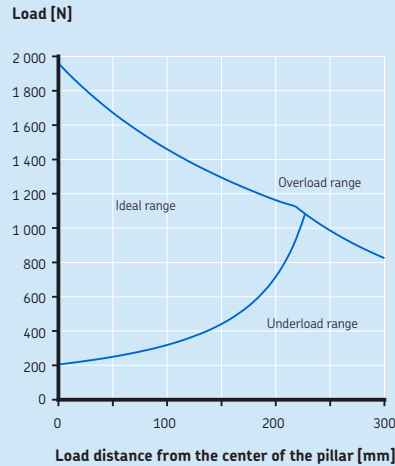


Offset load at full extension in the best axis

Speed-load diagram

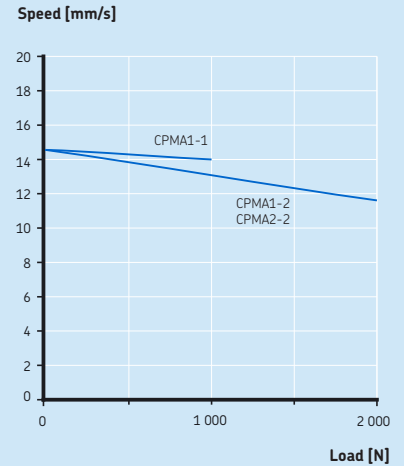

More flexibility with Series CPMA design options
Built-in with outer tube on top


- More hygienic and easy-to-clean design



Motor orientation B Motor orientation A



Built-in with outer tube on bottom

- More aesthetic design



Motor orientation A Motor orientation B

Fixing armatures available as accessory

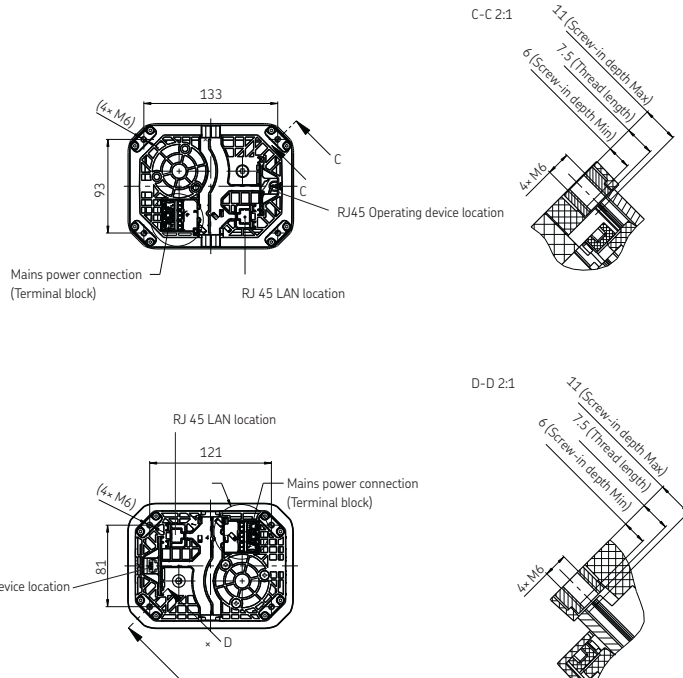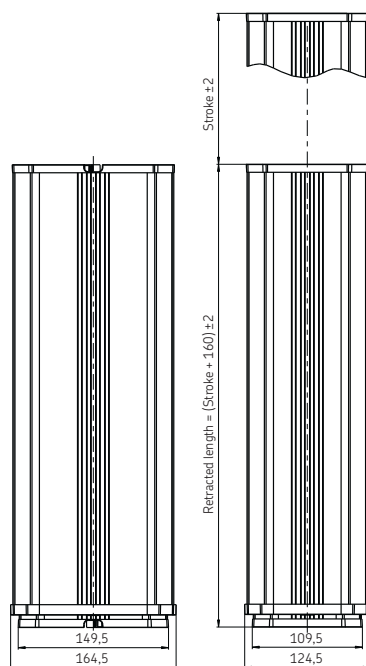

Pillar must be attached on plane and rigid surface by 4 screws M6 with a depth of 6 to 11 mm in the pillar. The total length of the screw must be adjusted to the height of the fixture.

Ordering key

CPMA - 2 - - - - - 000

Type

Voltage

100–240 V AC 50/60 Hz
24 V DC

1
2

Load:

Push (N)
1 000 Only for AC version
2 000

1
2

Tube set

2-section

2

Stroke length (mm)

200 Only for DC version
230
250
300
400
Other per 10 mm from 200 mm or 230 mm for AC version up to 400 mm

Motor orientation*

Motor in inner tube
Motor in outer tube

A
B

Operating device orientation

Operating device socket as the motor
Operating device socket at both sides

A
B

LAN cable through

No
LAN cable through Not compatible with op. device socket at both sides

0
1

*Pillar can be placed with outer tube on the top or bottom (please refer to page 3)

Accessories

Description	Plug	Country	Part number
Mains cable straight 2,5 m	Schuko	Germany, France, ...	ZKA-140449-2500
	Typ-L	Italy	ZKA-140450-2500
	British standard	UK	ZKA-140451-2500
	NEMA	USA, Japan, ...	ZKA-140452-2500
	SEV	CH	ZKA-140458-2500
	AS 3112	PRC, Australia, ...	ZKA-140460-2500
Detachable mains cord straight 2,5 m (to plug in socket box Inlet)	Schuko	Germany, France, ...	ZKA-140453-2500
	Typ-L	Italy	ZKA-140454-2500
	British standard	UK	ZKA-140455-2500
	NEMA	USA, Japan, ...	ZKA-140456-2500
	SEV	CH	ZKA-140459-2500
	AS 3112	PRC, Australia, ...	ZKA-140461-2500
Desk switch with LED, cable 0,5 m			STK01-SW3000-X100
Desk switch with LED, cable 1,0 m			STK01-UW3000-X100
Handset with LED, cable coiled 1,3 m			EHA41-13N00N-000
Foot switch, cable coiled 1,3 m			STL01-GW1000-X100
Mounting plate			ZPL-348382
Socket box inlet: IEC, RJ45 LAN, RJ45 op. device			ZDV-348220-002
Socket box outlet: 3xIEC, RJ45 LAN, RJ45 op. device			ZDV-348221-002

© SKF is a registered trademark of the SKF Group.

© SKF Group 2013

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MT/P8 13274 EN · March 2013

